

1. Log into the Home Centre

The screenshot shows the 'Set Mode' interface in the akubela system. The left sidebar contains navigation options: Set Mode, Devices, Scene, Security, Energy, Wallpaper, Notification, Setting, and Dimming Group. The main area is titled 'Set Mode' and 'Device List'. It displays a grid of device cards, each with a name, model, IP address, MAC address, and connection status. Below the grid is a 'Multi-device Operation' section with buttons for Reboot, Reset to Factory Setting, and Reset to Installer Setting. A table lists the devices and their specifications.

All	Name	IP Address	Model	Software Version	Hardware Version
☐	HyPanel Pro	10.1.10.104	PG71	71.1.30.137	71.48.16.16.0.0.0.16.0.10.8.0.0.0
☐	Hypanel KeyPlus27CA6B		K553		
☐	HyPanel Lux-2848FB	10.1.10.234	RT61	61.1.30.54	61.48.17.16.0.0.0.16.0.10.9.0.0.0
☐	Hypanel Lux24EA73	10.1.10.216	CT61	161.1.30.76	161.48.1.2.0.0.0.0.0.0.2.8.0.0.0
☐	HyPanel Plus	10.1.10.221	P852V2	52.1.39.116	52.48.17.16.0.0.0.0.0.0.10.8.0.0.0
☐	HyPanel Ultra	10.1.10.161	PH81	281.1.39.128	25.48.16.16.0.0.0.0.0.0.10.8.0.0.0

Local Contacts List

Contacts Type: All [Reset] Search: [] [Reset]

[Add] [Import] [Export]

2. Go to Devices


The screenshot shows the 'Devices' interface in the akubela system. The left sidebar contains navigation options: Set Mode, Devices, Scene, Security, Energy, Wallpaper, Notification, Setting, and Dimming Group. The main area is titled 'Public Area' and shows a hierarchical view of devices across different areas and floors. The devices are displayed in a grid, with each card showing the device name, model, and current status (e.g., temperature, humidity, power).

Public Area


- Public Area: 5/6
 - S532-24102D
 - X915S-20EF01
 - NVR Turret
 - R25A
 - X912K-2AA824
 - E12W-23B915
- Top Floor-Main Office
 - HyPanel Pro
 - Current Temperature: 25.5 °C
 - Humidity: 49.8 %
 - Test C6
 - IR Controller
 - Current Temperature: 28.2 °C
 - Humidity: 34.8 %
 - Panasonic AC
 - Power: [On]
 - Preset Temperature: 23.0 °C
 - Upstairs office Reed
 - The last trigger: 08-22 07:17:29
 - Battery: 15 %
 - Upstairs Office C6
 - SOS Emergency Button - Kerry Desk
 - The last trigger: 06-06 15:03:53
 - Battery: 17 %
 - Occupancy Sensor
 - The last trigger: 08-18 07:29:22
- Top Floor-Demo Room
 - HyPanel Ultra
 - Current Temperature: 23.5 °C
 - Humidity: 49.4 %
 - Hypanel KeyPlus27CA6 B
 - Current Temperature: -- °C
 - Humidity: --
 - Hypanel KeyPlus27CA6 B - relay
 - Power: [On]
 - Hypanel KeyPlus27CA6 B - relay2
 - Power: [On]
 - Store Room PIR
 - The last trigger: 08-22 08:12:58
 - Battery: 100 %
 - Demo Room PIR
 - The last trigger: 07-15 16:41:37
 - Battery: 100 %
 - RHS shelf
 - Power: [On]
 - TV Shelf
 - Power: [On]
 - Aku Commercial
 - Aku Apartment
 - Aku Indoor
 - Aku Access Control
 - AKUBELA Panel
 - Aku Resi
 - 4 Gang Scenario Switch

3. Find the Lux

4. Click Settings

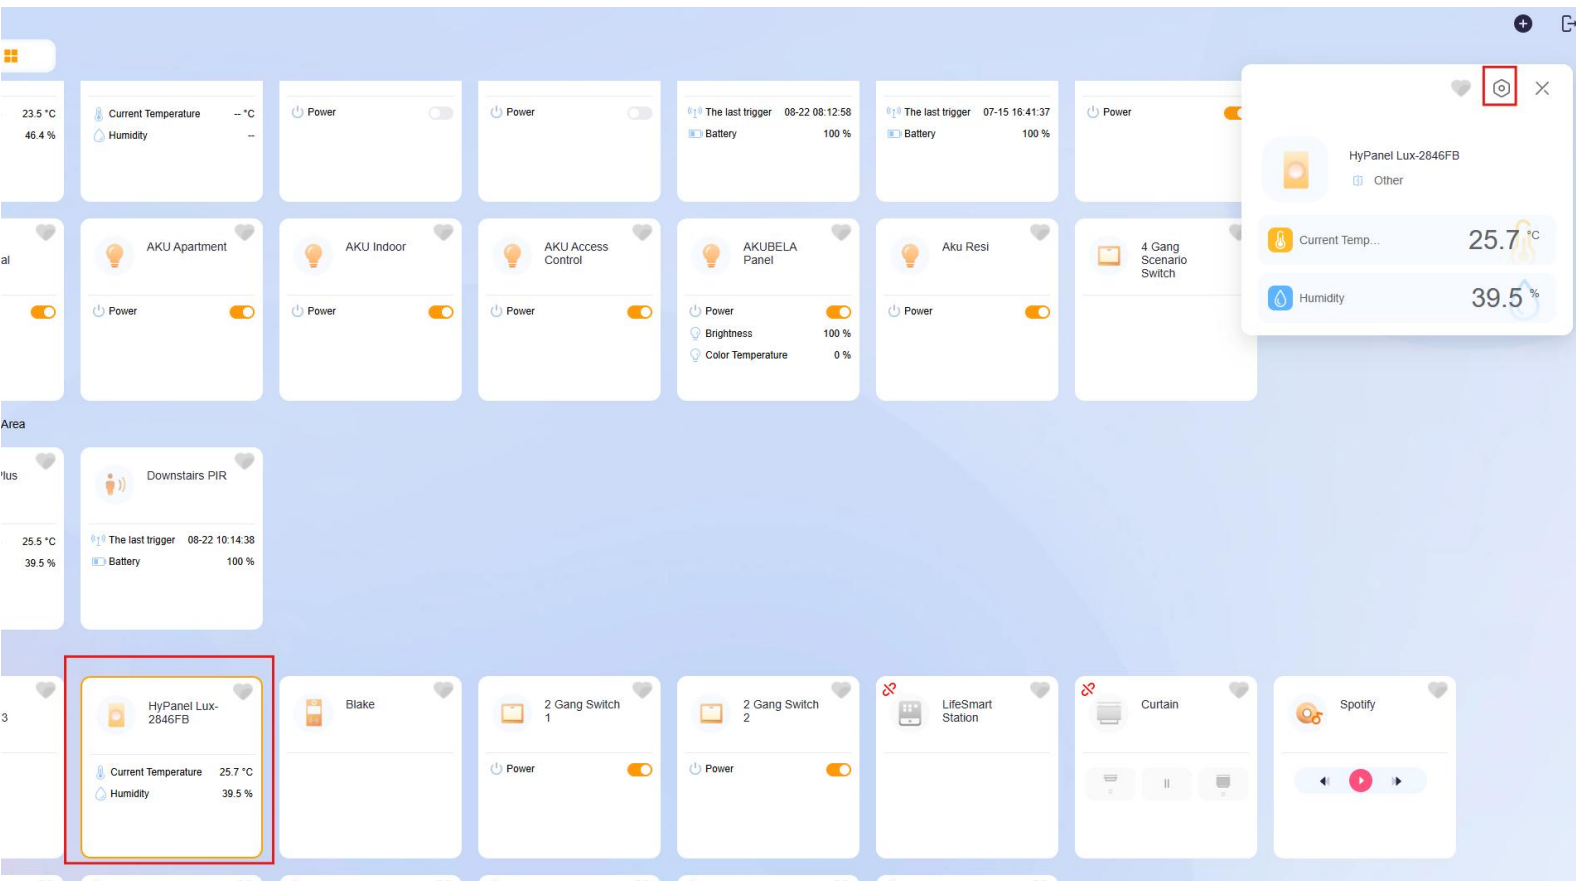

5. Go to “Device Permissions”

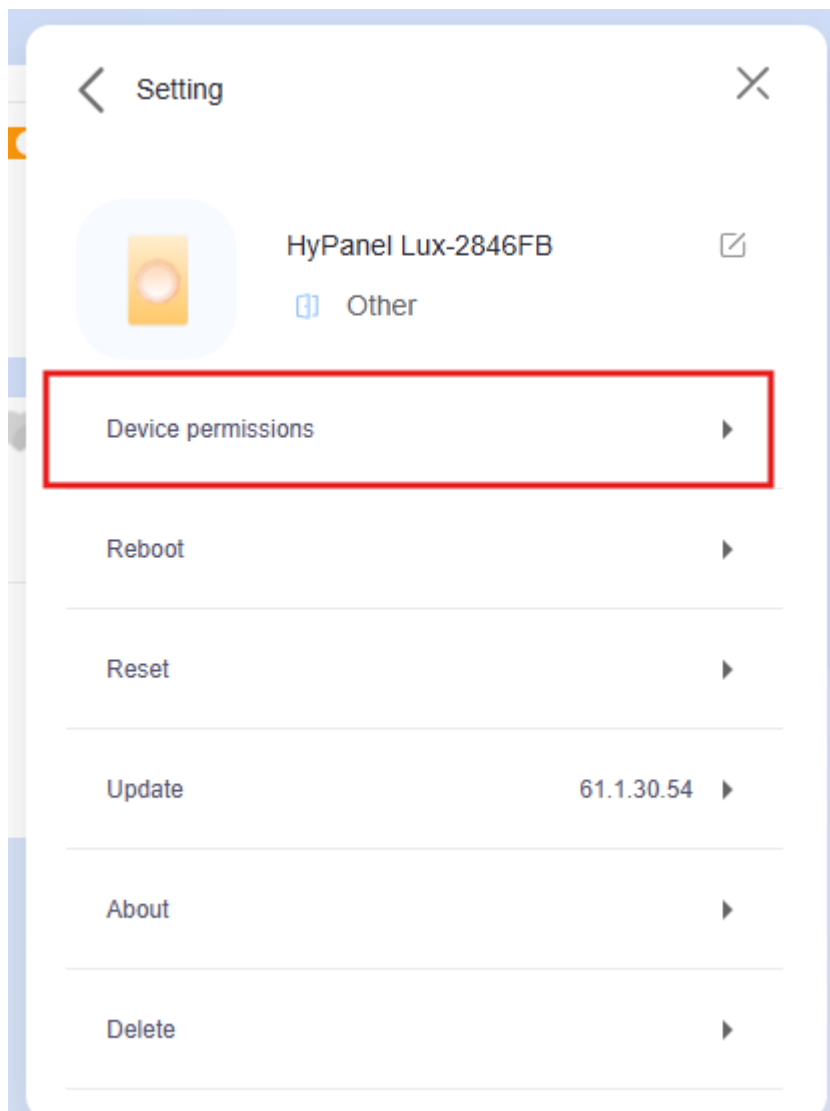

6. Enable everything.

